

A Compact UWB MIMO Antenna for Portable Applications

HU Hao, LU Zhi-gang

(National Key laboratory of High Power Vacuum Electronics, CPE of UESTC, Chengdu 610054, China;)

Abstract—A novel compact multiple-input-multiple-output (MIMO) antenna for portable ultrawideband (UWB) applications is presented. This antenna consists of two modified planar-monopole antenna elements with coplanar waveguides fed printed on one side of the substrate. To enhance isolation and increase impedance bandwidth, a tree like stubs is placed on the ground plane at the 45° axis. The measured results show that the MIMO antenna operates from 2.3 GHz to 13 GHz, covering WLAN, WiMAX, and UWB. The low mutual coupling and low envelope correlation coefficient of less than 0.2 across the whole frequency band proved this antenna is suitable for MIMO/diversity systems. Also, good performance of radiation patterns and the antenna's compact size making it a good candidate for portable devices.

Keywords—Multiple-input-multiple-output (MIMO) antenna, pattern diversity, planar monopole, ultrawideband (UWB).

I. INTRODUCTION

Since the Federal Communications Commission (FCC) in the US for opened the permit of 3.1–10.6 GHz spectrum for applications with low power emission in 2002[1], ultrawideband (UWB) became a rapidly growing technology. multiple-input-multiple-output (MIMO) technology can be used to improve the capacity and link quality[2]. Ultrawideband (UWB) system combined with MIMO technology can provide more than 1 Gb/s data rates [3]. However, one of the main challenges to the design of MIMO antennas for portable devices is low mutual coupling in small space.

In recent years, many MIMO antennas have been proposed for UWB systems, including etching a ring slot in the ground plane [4] and [5], inserting stubs between the two radiating elements [6], and good isolation was achieved by the tree-like structure between the two antenna elements.

In this paper, a low mutual coupling compact UWB MIMO antenna with a bandwidth from 3.1 to 12.6 GHz is proposed. It has a compact size of 46mm × 46 mm. Two planar-monopole antenna elements with coplanar waveguides fed are placed perpendicularly to each other. A stub is placed on the ground plane to enhance isolation and bandwidth. The simulated and measured performances show that the MIMO antenna is a good candidate for portable UWB applications.

II. ANTENNA DESIGN

A. Antenna Configuration

The geometry of the proposed antenna is shown in Fig. 1, with an overall size of only 46 × 46 mm. It is designed on a on an FR4 substrate, with a thickness of 0.8 mm, a permittivity of 4.4, and a loss tangent of 0.02. This antenna consists of two modified planar-monopole antenna elements which were staircase-shaped square radiators. CPW were used to fed antenna elements. The ground plane consists of a tree-like stub, which can efficiently enhance wideband isolation characteristics. The geometry and the dimensions of the proposed antenna is further illustrated in Fig. 1 with details.

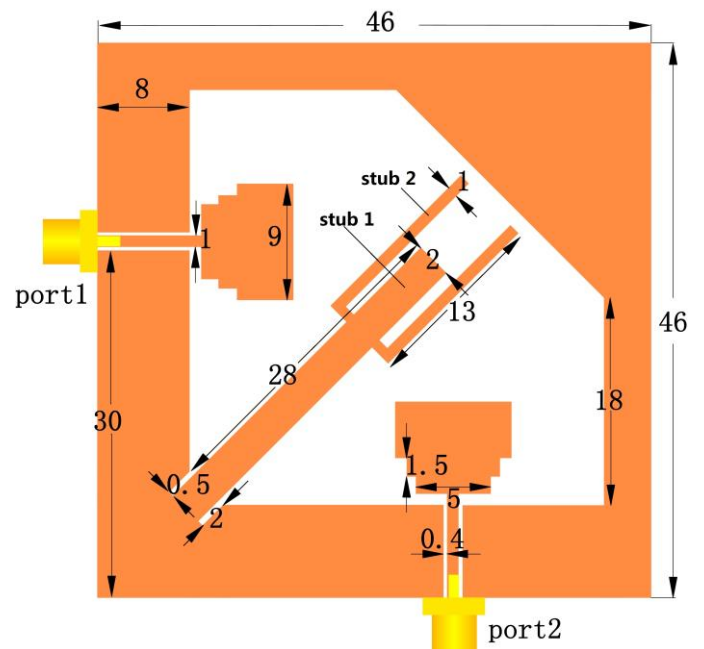


Fig. 1. Configuration and parameters of proposed antenna.

B. Isolation Stubs

In this section, High Frequency Structure Simulator (HFSS) is carried out in order to study the effectiveness of the proposed tree-like structure.

The tree-like structure consists of two stubs. Stub 1 can be seen as a reflector and mutual coupling between the two modified planar-monopole antenna elements can be weakened. With stub 2, more resonances will be introduced, and a wideband isolation can be achieved. In Fig. 2, we can see the

isolation across the operating band improvement by introduce stub 1 and stub 2.

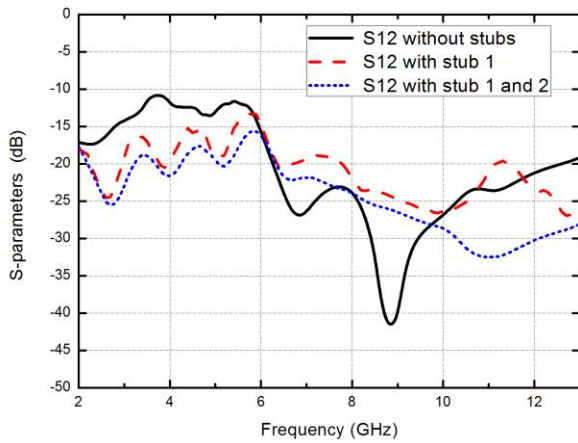


Fig. 2. Simulated S12 and S21 when total number of stubs varies.

III. EXPERIMENT RESULTS AND DISCUSSION

A. Impedance Performance

An antenna prototype is fabricated, as shown in Fig. 3. The S-parameters are measured with the Agilent E8363B vector network analyzer. Figure 4 shows the simulated and measured S-parameters of the proposed antenna. According to the measured results, the impedance bandwidth (defined by a return loss of no less than 10- dB) is from 2.3 GHz to 13GHz. According to the measurement shown in Fig. 4(b), the isolation between the two modified planar-monopole antenna elements is less than 20- dB. So that this antenna is suitable for portable devices.



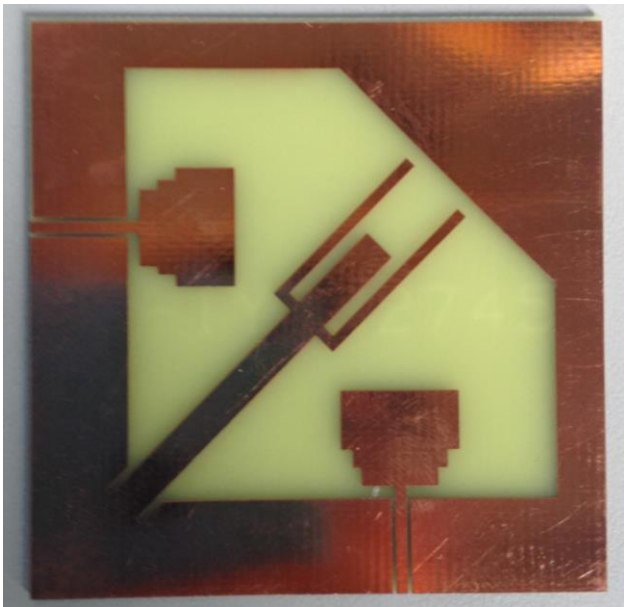


Fig. 3. Prototype of proposed antenna.

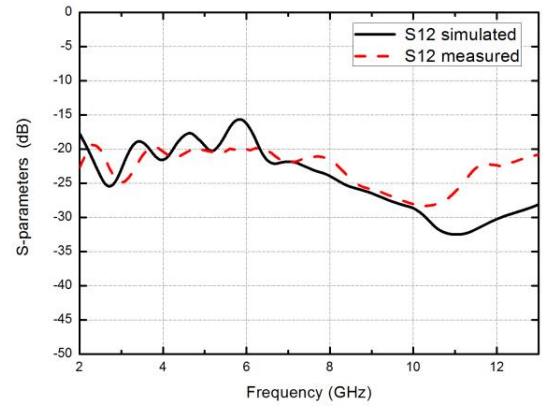

(a)

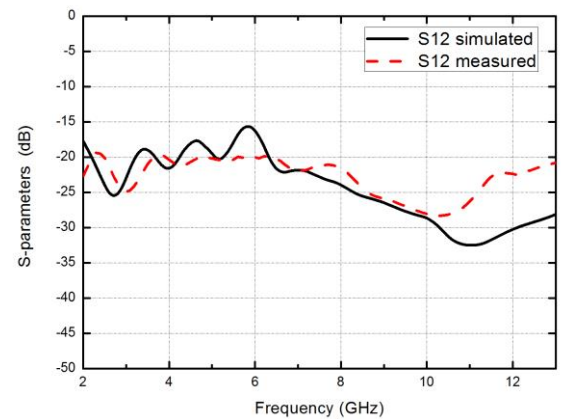

(b)

Fig. 4. Measured and simulated S-parameters of proposed antenna: (a) S11 and S22, (b) S12 and S21.

B. Radiation Performance

The radiation patterns are measured with the anechoic chamber SATIMO StarLab. Figure 5 shows the radiation patterns at 2.5 GHz, 6.5 GHz, and 10.5 GHz, Port 1 is excited while Port 2 is terminated with a 50-Ω load. The measurement gain of port 1 is plotted in Fig. 6. The gains range from 3 to 6.5 dBi across the frequency band from 2.9–13 GHz.

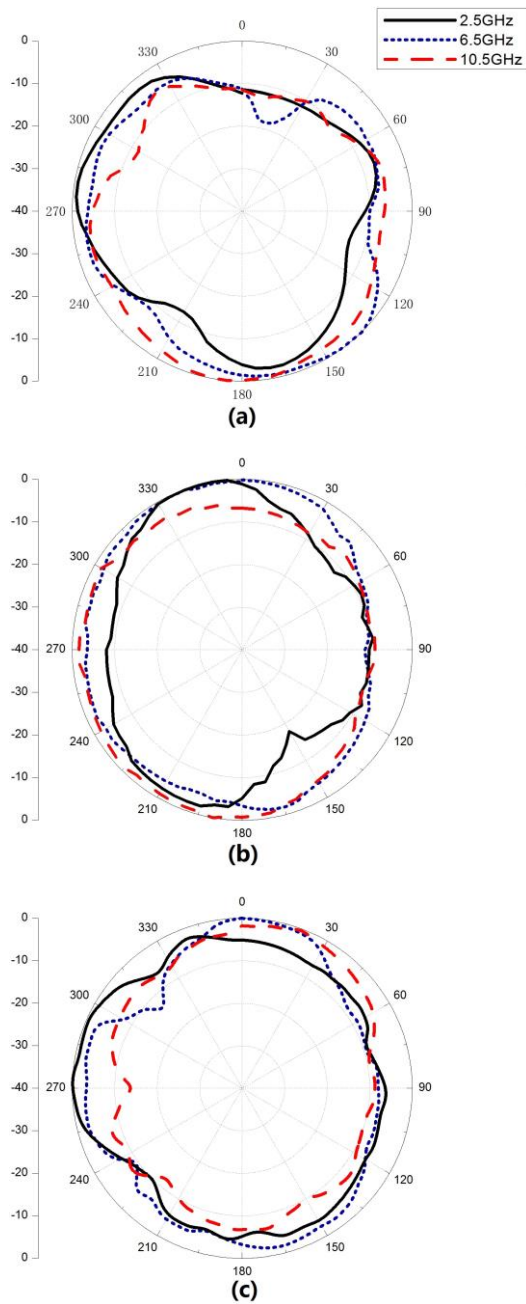


Fig. 5. Measured radiation patterns of proposed antenna at 2.5 GHz, 6.5 GHz, and 10.5 GHz: (a) XY plane, (b) XZ plane, and (c) YZ plane.

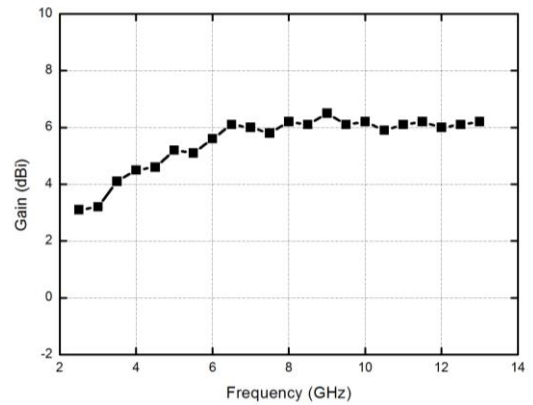


Fig. 6. Measured gain of proposed antenna.

C. Diversity Performance

The envelope correlation coefficient (ECC) is an important parameter for evaluating the performance of the diversity system. The proposed antenna is below 0.01 across the whole operating frequency, shows that the antenna is suitable for a diversity system.

IV. CONCLUSION

A dual port pattern diversity UWB antenna was presented. This antenna consists of two modified planar-monopole antenna elements and a tree-like stub is extended from the ground plane, which enhances the isolation coefficient more than 20 -dB. An impedance bandwidth of 2.3 GHz to 13 GHz was obtained, and measurements of radiation patterns, antenna gain, and the ECC were shown. The antenna's compact size makes it suitable for portable MIMO/diversity applications.

V. ACKNOWLEDGMENT

Thanks for the guidance of professor lu zhi-gang

VI. REFERENCES

- [1] Federal Communications Commission, "First Report and Order," Revision of Part 15 of Commission's Rules Regarding UltraWideband Transmission Systems, Feb. 2002.
- [2] Jan. Mietzner, Robert. Schober, Lutz. Lampe, et al. "Multiple-Antenna Techniques for Wireless Communications A Comprehensive Literature Survey." *IEEE Communications Surveys & Tutorials*, 2009, vol. 55, no. 8, pp.87-105
- [3] T. Kaiser, F. Zheng, and E. Dimitrov, An overview of ultra-wideband systems with MIMO, *Proc IEEE 97* (2009), pp.285–312.
- [4] K. Wei et al., "A Novel Hybrid-Fed Patch Antenna with Pattern Diversity," *IEEE Antennas Wireless Propag. Lett.*, vol. 9, Apr. 2010, pp. 562-565.
- [5] E. Antonino-Daviu et al., "Ultrawideband Slot Ring Antenna for Diversity Applications," *Electron. Lett.*, vol. 49, no. 7, Apr. 2010, pp. 478-480.
- [6] S. Zhang, Z. Ying, J. Xiong, and S. He, "Ultrawideband MIMO/diversity antennas with a tree-like structure to enhance wideband isolation," *IEEE Antennas Wireless Propag. Lett.*, vol. 8, pp. 1279–1282, 2009.